


Uponor Vario S S manifold FM 3x3/4 Euro

1086539

Uponor Vario S is a stainless steel manifold for use in radiant heating and cooling systems. The 3/4 eurocone connectors allow the connection of all Uponor pipe dimensions. Which makes this manifold universal for Uponor underfloor heating and cooling systems. Comes complete with fill and drain points, 1" swivel connectors and valve pins for actuator control.

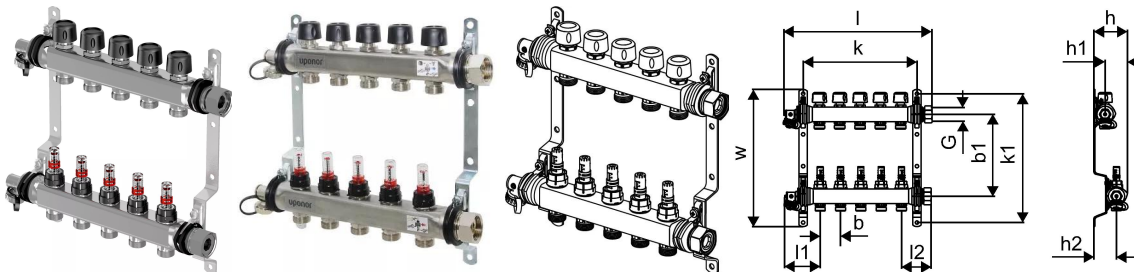

No about information

Uponor Vario S S manifold FM 3x3/4 Euro

1086539



Technical data

| | |
|----------------------------|----------|
| Item Quantity 1 | 1 |
| Item Quantity 2 | 108 |
| Item (unit of measurement) | pce |
| Cylindric_thread_G | 1 inch |
| Cylindric_thread_G1 | 3/4 inch |
| Number of outlets | 3 - |
| pressure | 6 bar |
| Length (l) | 260 mm |
| Length (l1) | 87 mm |
| Length (l2) | 73 mm |
| Z-measurement b | 50 mm |
| Z-measurement b1 | 215 mm |
| Z-measurement h | 75 mm |
| Z-measurement h1 | 30 mm |
| Z-measurement h2 | 50 mm |
| Z-measurement k | 185 mm |
| Z-measurement k1 | 336 mm |
| Z-measurement w | 357 mm |

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb