


## Uponor Vario S S manifold FM 7X3/4 Euro

**1086543**


Uponor Vario S is a stainless steel manifold for use in radiant heating and cooling systems. The 3/4 eurocone connectors allow the connection of all Uponor pipe dimensions. Which makes this manifold universal for Uponor underfloor heating and cooling systems. Comes complete with fill and drain points, 1" swivel connectors and valve pins for actuator control.

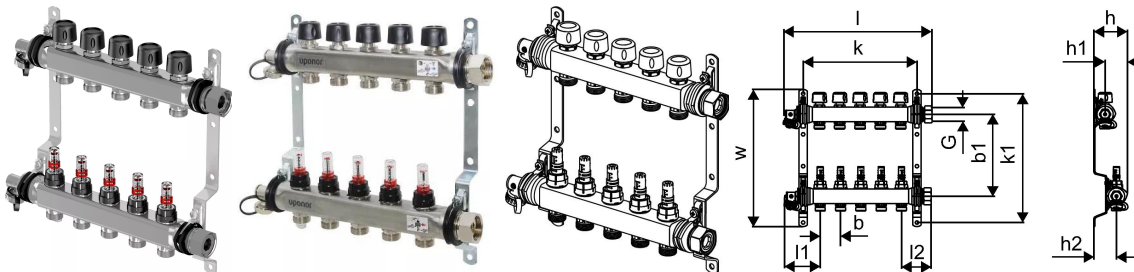

No about information

## Uponor Vario S S manifold FM 7X3/4 Euro

1086543

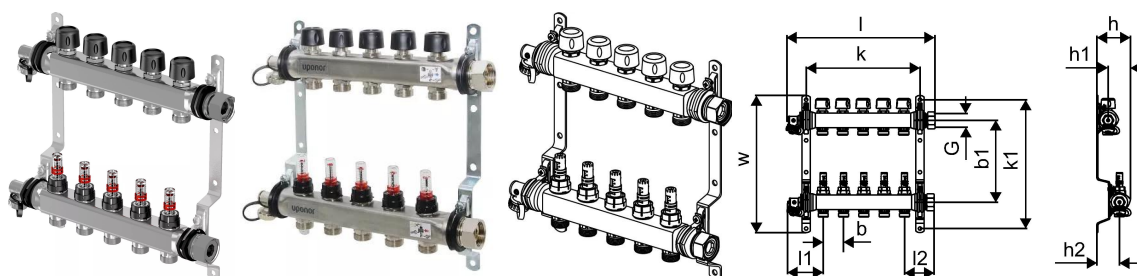

### Technical data

Item Quantity 1	1
Item Quantity 2	72
Item (unit of measurement)	pce
Cylindric_thread_G	1 inch
Cylindric_thread_G1	3/4 inch
Number of outlets	7 -
pressure	6 bar
Length (l)	460 mm
Length (l1)	87 mm
Length (l2)	73 mm
Z-measurement b	50 mm
Z-measurement b1	215 mm
Z-measurement h	75 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	385 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm

### Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)